

**Full-Color**

**Dome Network Camera**

MODEL: VIGI C250(2.8/4mm)



**5MP | H.265+**

VIGI C250(2.8/4mm)



People & Vehicle  
Analytics\*



Human & Vehicle  
Classification



Smart Detection



True WDR




Built-In Microphone



Onboard Storage\*\*

## // People & Vehicle Analytics

Quickly find people or vehicles of interest using various attributes, greatly improve your search efficiency\*.



## // Human & Vehicle Classification


Intelligently distinguishes humans and vehicles from other objects, so you receive more accurate event notifications.



## // Smart Detection



Motion Detection



Region Intrusion



Object Removal Detection



Object Abandoned Detection



Region Exiting Detection



Region Entering Detection



Line-Crossing



Scene Change Detection



Loitering Detection



Camera Tampering

## // SmartVid



### Smart IR

Keeps objects from being under-rendered when far away or overexposed when close to camera at night.



### 120dB WDR

Enables crystal-clear images in high contrast scenes.




### 3D DNR

Removes abnormal pixelation to provide clearer video and eliminate distortion.

## // VIGI Surveillance Solution

The VIGI professional surveillance system by TP-Link is dedicated to protecting the business that you've worked hard to build—whenever, wherever.

Outstanding functions, reliable quality guarantees, and simplified installation work together to ensure your business stays safe and sound.

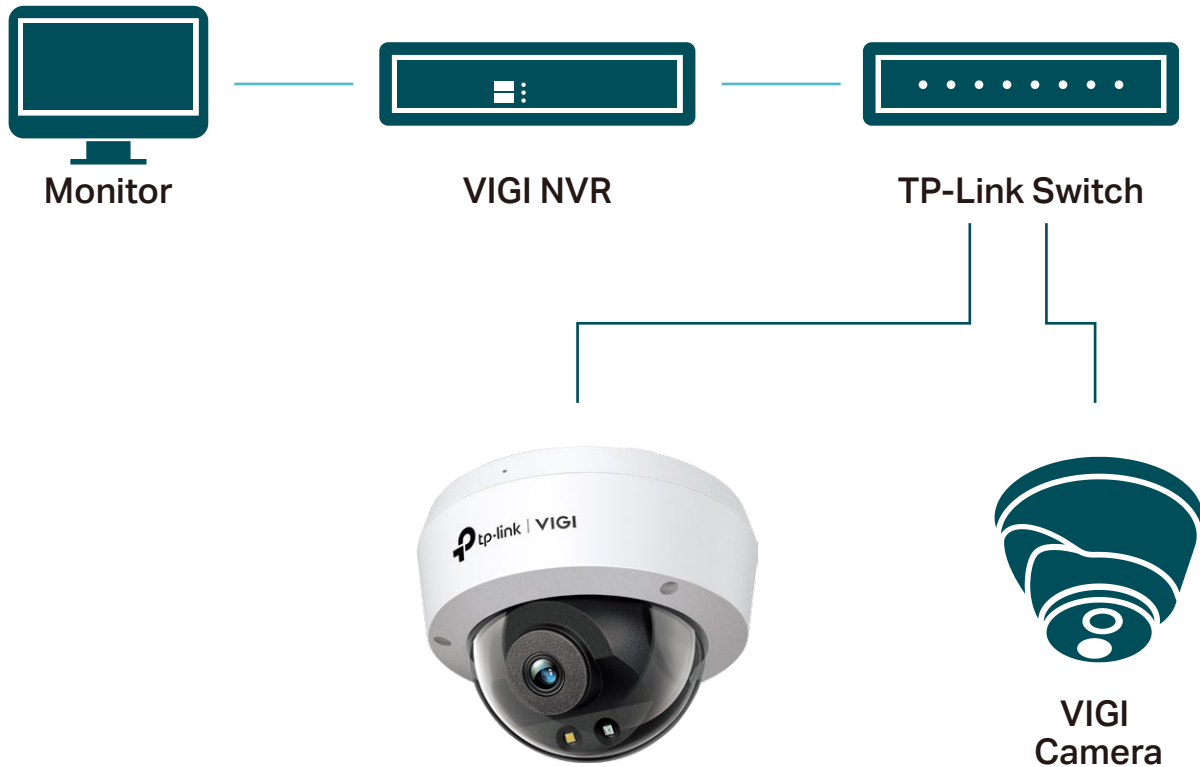

## // Flexible Installation

Easily route your camera's cable into a dropped ceiling or avoid drilling by slotting it through the camera's side outlet.



## Specifications

Camera					
Product Model	VIGI C250				
ROM	128 MB				
RAM	1G				
Image Sensor	1/2.7" Progressive Scan CMOS				
Shutter Speed	1/3 to 1/10000 s				
Slow Shutter	Yes				
Min. Illumination	0.005 Lux, 0 Lux with IR/white light				
Day & Night	IR Cut Filter				
Day/Night Switch	Day/Night/Auto/Schedule-Switch				
Lens					
Type	Fixed Focal Lens				
Focal Length	2.8 mm/4 mm				
Aperture	2.8 mm: F1.6 4 mm: F1.6				
FOV	2.8mm: Horizontal FOV: 109°, Vertical FOV: 57°, Diagonal FOV: 128° 4mm: Horizontal FOV: 90°, Vertical FOV: 48°, Diagonal FOV: 107°				
Lens Mount	M12*P 0.5				
DORI Distance	Lens	Detect	Observe	Recognize	Identify
	2.8 mm	64 m (209 ft)	27 m (87 ft)	13 m (42 ft)	6 m (21 ft)
	4 mm	80 m (262 ft)	33 m (109 ft)	16 m (52 ft)	8 m (26 ft)

Angle Adjustment (Manual)	
Range	Pan: 0° to 360°, Tilt: 0° to 85°
Illuminator	
IR LED	Quantity: 1 Range: 30m Wavelength: 850nm
White LED	Quantity: 1 Range: 30m
Illuminator On/Off Control	Auto/Scheduled/Always on/Always off
Video	
Max. Resolution	2881 X 1620
Main Stream	<p>Frame Rate 50Hz: 1fps, 5fps, 10fps, 15fps, 20fps, 25fps 60Hz: 1fps, 5fps, 10fps, 15fps, 20fps, 25fps, 30fps</p> <p>Resolution: 2880x1620, 2688x1520, 2304x1296, 2048x1280, 1920x1080, 1280x720</p> <p>Note: If the image rotation is set to 90° or 270°, the frame rate only supports up to 20fps.</p>
Sub-Stream	<p>Frame Rate: 50Hz: 1fps, 5fps, 10fps, 15fps, 20fps, 25fps 60Hz: 1fps, 5fps, 10fps, 15fps, 20fps, 25fps, 30fps</p> <p>Resolution: 704x576, 640x480, 352x288, 320x240</p> <p>Note: If the image rotation is set to 90° or 270°, the frame rate only supports up to 20fps.</p>
Bit Rate Control	CBR, VBR
Video Compression	Main Stream: H.265+/H.265/H.264+/H.264 Sub-Stream: H.265/H.265
H.264 Type	Main Profile/High Profile
H.264+	Main Stream Supported

H.265 Type	Main Profile
H.265+	Main Stream Supported
Video Bit Rate	Main Stream: 256 Kbps to 6 Mbps Sub-Stream: 64 Kbps to 512 Kbps
<b>Image</b>	
Image Settings	Mirror, Brightness, Contrast, Saturation, Sharpness, Exposure, WDR, White Balance, Prevent Overexposure to Infrared Light, HLC Adjustable by Client Software, Rotation (90°/270°)
Image Enhancement	BLC/3D DNR/HLC/SmartIR
Wide Dynamic Range	DWDR
Wide Dynamic Range	120 dB
SNR	≥ 52 dB
Image Parameters Switch	Yes
Privacy Mask	Up to 4 Masks
ROI	1 Region
OSD Setting	Yes
<b>Audio</b>	
Audio Communication	N/A
Audio Input	Yes
Audio Output	N/A
Audio Compression	Yes
Audio Sampling Rate	8KHz
Environment Noise Filtering	Yes
Audio Bit Rate	64 Kbps(G.711 alaw)


Network	
Protocols	TCP/IP, UDP, ICMP, HTTP, HTTPS., DHCP, DNS, RTSP, NTP, UPnP, SSL/TLS, FTP, SFTP, RTP, IPv4, IPv6, ARP
Cyber Security	Video encryption, Configuration encryption, Digest Authentication, HTTPS, IP Address Filter, trusted upgrade
SDK and API	Beta
Web Browser	Google Chrome® 57 and above Firefox® 52 and above Safari® 11 and above Microsoft® Edge 91 and above
Security	Password Protection, HTTPS Encryption, IP Address Filter, Digest Authentication
Simultaneous Live View	3 Main Streams & 3 Sub-Streams
Client	VIGI App, VIGI Security Manager, VIGI NVR, Web
Cloud	Yes
ONVIF	Yes (Profile S)
Interface	
Network Interface	1 RJ45 10/100M Self-Adaptive Ethernet Port, PoE
Storage	FTP, SFTP, Built-In Memory Card Slot, Support MicroSD Card up to 256 GB
Built-in Speaker	N/A
Built-in Microphone	Yes, Records Anything Going on within a 15-ft Radius of the Camera
Audio	N/A
Alarm	N/A
Reset Button	Yes
Power	DC Power Port

Alarm and Event Management		
Smart Event	Human & Vehicle Classification, Intrusion Detection, Line-Crossing Detection, Region Entering Detection, Region Exiting Detection, Object Abandoned Detection, Object Removal Detection, Loitering Detection, Smart Frame, People Detection, Vehicle Detection, Motion Detection, Video Tampering Detection, Exception (Illegal Login), Scene Change Detection	
Basic Event	Motion Detection, Video Tampering Detection, Exception (Illegal Login), Scene Change Detection	
Alarm Linkage	Memory Card Video Recording, Message Push, White Light Flashing	
Linkage Method	N/A	
Output Notification	Message Push	
Deep Learning Function		
Multi-Target-Type Detection	Supports Simultaneous Detection and Capture of Human Body and Vehicle	
General		
Operating Temperature	-30–60 °C	
Storage Temperature	-40–60 °C	
Operating Humidity	95% or Less (Non-Condensing)	
Storage Humidity	95% or Less (Non-Condensing)	
Power Supply	12V DC $\pm$ 5%, 5.5mm Coaxial Power Plug PoE (802.3af/at, class 0)	
Power Consumption	Maximum	7 W
	Typical (Day Mode)	1.5 W
	Typical (Night Mode with IR LED)	2.5 W
	Typical (Night Mode with White LED)	2.8 W



Material	Plastic
Protection	IP67, IK10
Product Dimensions (L x W x H)	Φ115 x 85.7 mm
Package Contents	VIGI Network Camera Quick Start Guide Waterproof Cable Attachments Mounting Accessories
Net Weight	0.28 Kg
Gross Weight	0.47 Kg
Certifications	CE, NTRA, VCCI, KC, BSMI, FCC, IC

### Dimensions

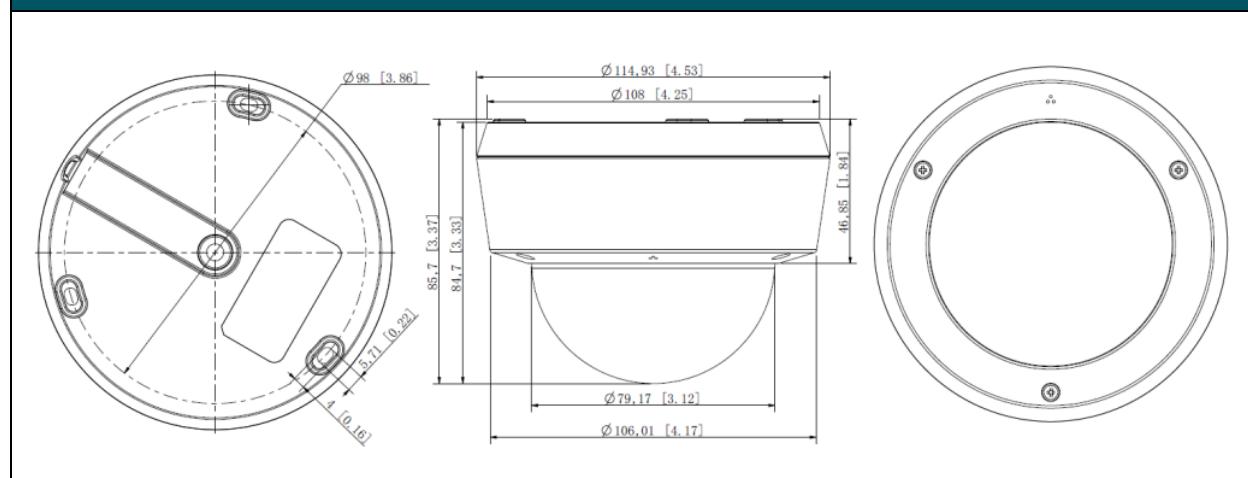

\*SD card is not included in the package.

Specifications are subject to change without notice and can be found at [www.tp-link.com](http://www.tp-link.com).

©2023 TP-Link